



8. Remove the 90° fitting from the bottom of the gas valve and install the straight fitting onto the bottom of the gas valve.

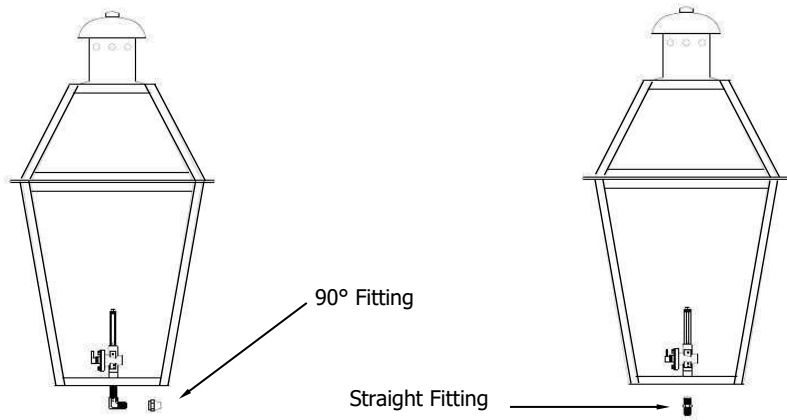

9. Connect the 1/4" gas line from the post straight fitting on the lantern.
10. Follow the leak testing procedure outlined in the Gas Lantern Installation Instructions.
11. Push the flexible tubing down into the post and connect the post fitter onto the lantern using the 4 fasteners supplied with the post fitter.

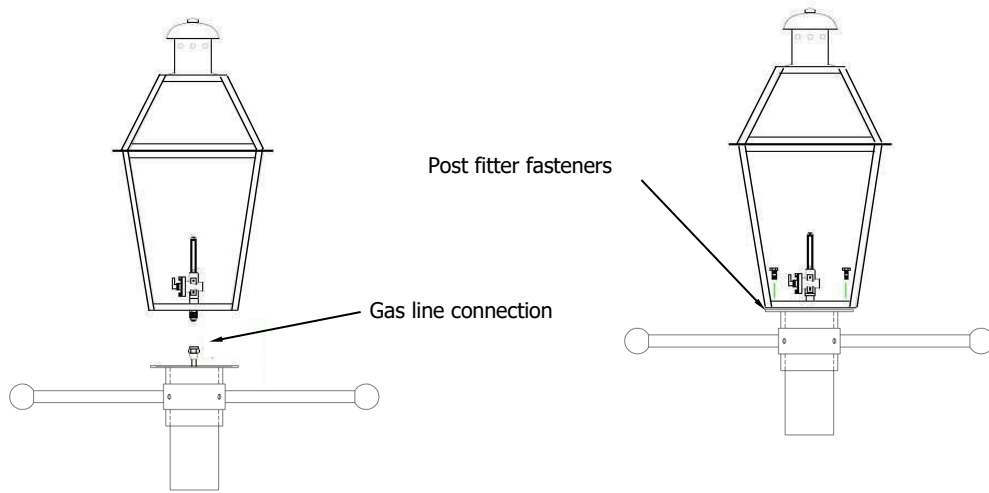

Post Fitter Instructions for Gas Lanterns with Ladder Rest Option

ALL POST FITTERS ARE DESIGNED TO BE USED ON A 3" OUTSIDE DIAMETER POST.

1. Remove the lantern from the packaging.
2. Read the installation instructions for Installation of Gas lanterns.
3. Remove the mounting bracket by removing the two brass ball nuts on each side of the lantern.
4. A 1/4" flexible copper gas line with a flare fitting should be ran to extend approximately 1-1/2" above the post.
5. Slide the Ladder Rest down onto the post
6. Slide the post fitter onto the post and tighten the four set screws provided with the hex wrench provided in the hardware kit.

